


GENIUS1 6V & 12V 1A



Auto | Marine | RV | Powersport | Lawn & Garden

NOCO genius

1™

BATTERY CHARGER™ + MAINTAINER **Equipment Land.**

EVERYTHING CHARGER.

Do more with Genius. Multi-voltage, chemistries, and types.



Meet the GENIUS1 - Similar to our G750, just better. It's 35% smaller and delivers over 35% more power. And it's simpler and easier to use than ever before. Plug-in, connect to the battery, select a charge mode, and start charging your battery. A fully-automatic, worry-free battery charger for year-round use. Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, maintenance-free, and lithium-ion batteries.

00.0v

CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.



BRING BATTERIES BACK TO LIFE.

Built-in desulfation mode for the most corroded batteries. Auto detection with smart diagnostic indicators starts a Repair Mode integrated within a 9-step charging profile.



THERMAL COMPENSATION.

An integrated thermal sensor detects the ambient temperature and alters the charge to eliminate over-charging in hot climates and under-charging in cold climates.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery. Leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO®

WHAT'S IN THE BOX.

NOCO Patented Technology

Patented: visit no.co/patents

Charger + Interchangeable Connector



107" (217cm)

21" (55cm)


Battery Clamps + Integrated Eyelets

User Guide



Maximum Versatility.

Genius clamps are built with needle-nose profiles for smaller terminal applications and detachable integrated eyelets for permanently mounting the accessory to the battery.

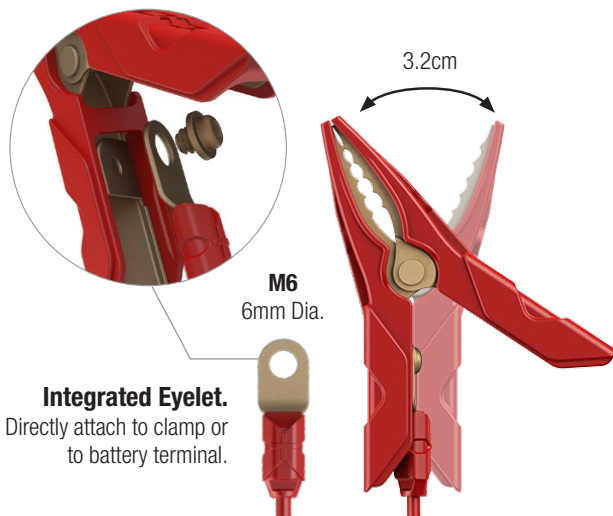

Integrated Eyelet.
Directly attach to clamp or to battery terminal.

Technical Specifications

Line Voltage AC:	120-240 VAC, 50-60Hz	DC Cable Length:	107 Inches
Output Power:	15 Watts Max	AC Cable Length:	None
Charging Voltage:	Various	Back Current Drain:	<0.5mA
Charging Current:	1A (12V), 1A (6V)	Battery Capacity:	Up to 30Ah, Maintains All Battery Sizes
Chemistry:	Lead-Acid and Lithium	Housing Protection:	IP60
Operating Temperature:	-4° to 104° F (-20° to +40° C)	Dimensions (LxWxH):	3.5 x 2.3 x 1.3 Inches
Storage Temperature:	-22° to 140° F (-30° to +60° C)	Unit Weight:	0.77 lbs
Low-Voltage Detection:	1V (12V), 1V (6V)	Cooling:	Natural Convection



Charging Times

(for reference, results may vary)

Battery Size	Approx. Charge Time in Hours	
	6V	12V
8Ah	6	6
12Ah	9	9
18Ah	13.5	13.5
24Ah	18	18
30Ah	22.5	22.5

WHAT'S IN THE BOX.

- GENIUS1 Battery Charger w/ Interchangeable Connector
- Clamps w/ Integrated Eyelets
- Mounting Bracket w/ Strap

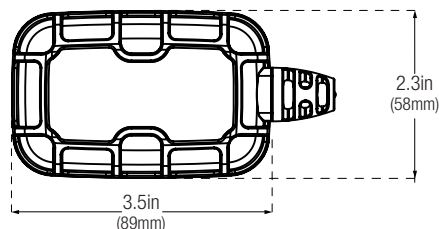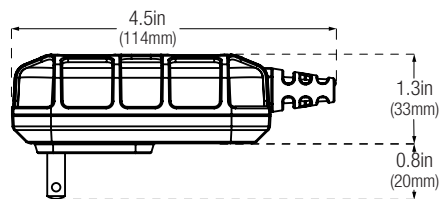

Retail Packaging:

Dimensions: 3.43" x 4.02" x 6.73"
Weight: 0.95lbs
UPC: 0-46221-19002-1

Inner Carton:

Dimensions: 6.97" x 3.70" x 4.25"
Weight: 1.08lbs

Master Carton:

Dimensions: 14.65" x 11.81" x 4.96"
Weight: 7.22lbs
Quantity: 6
UCC: 10046221190028

Units Per Pallet:

NA - 480 Units
International - 378 Units



NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

**Equipment
Land.**

NOCO®